



Launch Pin Transitions to Microstrip Circuits For Flange Mount Connectors

Launch Pin and Dielectric Transition to Microstrip

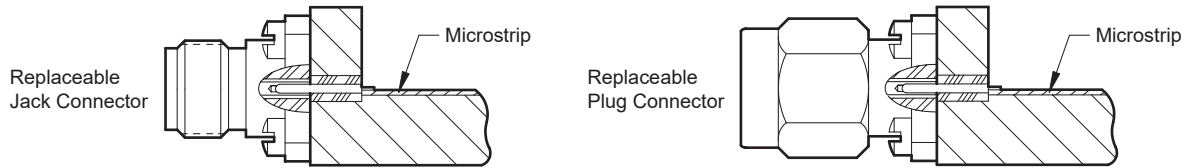

Dielectric Transition

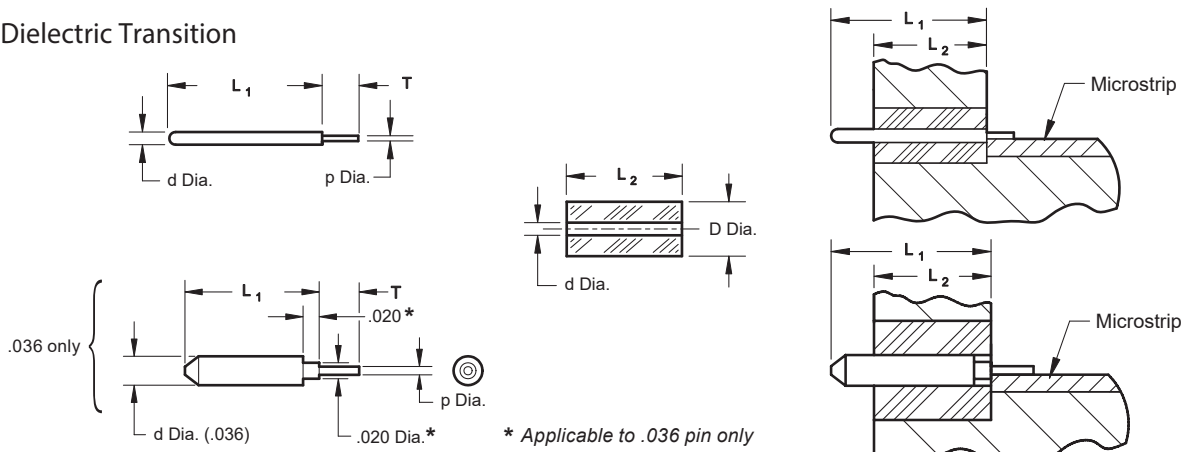

Materials/Construction:

- Launch Pin: BeCu Per ASTM B196
- Plating: Gold Over Nickel Per MIL-G-45204
- Dielectric: Virgin PTFE Fluorocarbon Per ASTM D1710

.036	.117	.050	.010	.175	.125	290-37P	290-37D
				.237	.187	290-36P	290-36D
.020	.064	.030	.007	.160	.125	290-14P	290-14D
				.225	.187	290-13P	290-13D
.015	.048	.015	.003	.160	.125	290-12P	290-12D
				.225	.187	290-11P	290-11D
.012	.039	.015	.003	.160	.125	1090-12P	1090-12D
				.225	.187	1090-11P	1090-11D
.009	.029	.015	.003	.160	.125	1490-12P	1490-12D
				.225	.187	1490-11P	1490-11D
d Dia.	D Dia.	T	p Dia.	L1	L2	Pin	Dielectric

Refer to Installation and Tools Section for Drill Information and Tools.

Accessory No.