
NOTE: Information herein is believed by Southwest Microwave, Inc. to be accurate. However, Southwest Microwave assumes no responsibility for any omissions or errors or inaccuracies for its use or for any infringements of patents or other rights of third parties that may result from its use. Data is intended for informational purpose only and does not constitute a contract of sale or any express or implied warranty, including any warranty of merchant ability or fitness for a particular purpose.

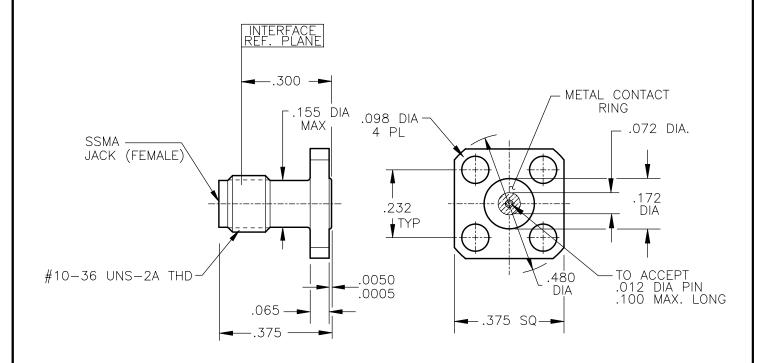

HOUSING:	STEEL, CRES ALLOY UNS—S30300 PER ASTM—A582. PASSIVATE PER QQ—P—35.			
CONTACT:	BeCu UNS-C17300 PER ASTM-B-196/197 GOLD PLATE PER MIL-G-45204			
DIELECTRIC INSULATOR:	VIRGIN TFE FLUOROCARBON PER ASTM-D-1710 AND ASTM-D-1457			
BEAD RING:	ULTEM 1000 PER ASTM-D-5205			
MATERIAL & FINISH				

PRODUCT DESIGN			055
SPECIFICATION GR	ROUP	DOC.	No.

- 2. INTERFACE IN ACCORDANCE TO MIL-STD-348.
- 1. ALL DIMENSIONS ARE IN INCHES, ALL ANGLES ARE IN DEGREES.

DATE: 5/7/04

NOTES: UNLESS OTHERWISE SPECIFIED

SOUTHWEST MICROWAVE	

RELEASE

Southwest Microwave, Inc. 9055 South McKemy Street Tempe, Arizona 85284-2946 Telephone (480) 783-0201

Fax (480) 783-0360

APRVD. B CLYATT DATE: 5/7/04

SSMA JACK 3/8SQ 4 HOLE FLANGE TO ACCEPT .012 DIA. PIN

DRN BY: EJO	DATE: 4/04	DWG.	NO.
SCALE:	3:1		
SHFFT: 1	OF 1	l	

79A58139

REV.