
NOTE: Information herein is believed by Southwest Microwave, Inc. to be accurate. However, Southwest Microwave assumes no responsibility for any omissions or errors or inaccuracies for its use or for any infringements of patents or other rights of third parties that may result from its use. Data is intended for informational purpose only and does not constitute a contract of sale or any express or implied warranty, including any warranty of merchant ability or fitness for a particular purpose.

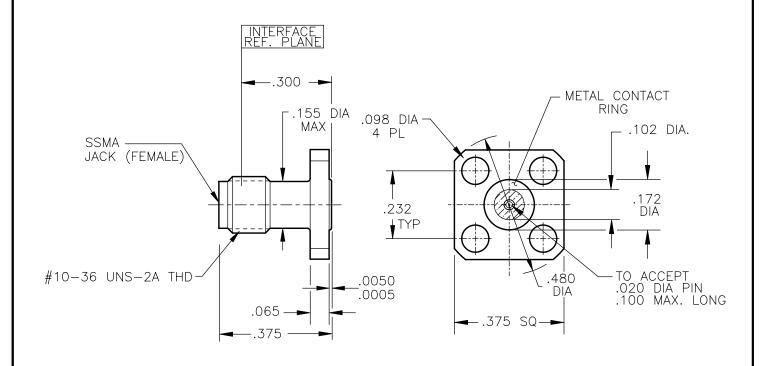

HOUSING:	STEEL, CRES ALLOY UNS—S30300 PER ASTM—A582. PASSIVATE PER QQ—P—35.			
CONTACT:	BeCu UNS-C17300 PER ASTM-B-196/197 GOLD PLATE PER MIL-G-45204			
DIELECTRIC INSULATOR:	VIRGIN TFE FLUOROCARBON PER ASTM-D-1710 AND ASTM-D-1457			
BEAD RING:	ULTEM 1000 PER ASTM-D-5205			
MATERIAL & FINISH				

PRODUCT	DESIGN	SPECS.	91A58	3259
SPECIFICATION GROUP			DOC.	No.

- 2. INTERFACE IN ACCORDANCE TO MIL-STD-348.
- 1. ALL DIMENSIONS ARE IN INCHES, ALL ANGLES ARE IN DEGREES.

DATE:

5/7/04

NOTES: UNLESS OTHERWISE SPECIFIED

 THWEST OWAVE

RELEASE

Southwest Microwave, Inc. 9055 South McKemy Street

APRVD.

B CLYATT

DATE:

Tempe, Arizona 85284-2946 Telephone (480) 783-0201 Fax (480) 783-0360

TITLE	MC	DEL	_ 11	2	-20	SF		
SSMA	JACK	3/8	3SQ	4	HOL	E	FLA	NGE
TC) ACCI	EPT	.02	0	DIA.	Ы	Ν	

DRN BY: EJO	DATE: 4/04	DWG.	NO.
SCALE:	3:1		
SHEET: 1	OF 1	1	

79A58145

REV. А