

18270-05G

NOTE: Information herein is believed by Southwest Microwave, Inc. to be accurate. However, Southwest Microwave assumes no responsibility for any omissions or errors or inaccuracies for its use or for any infringements of patents or other rights of third parties that may result from its use. Data is intended for informational purpose only and does not constitute a contract of sale or any express or implied warranty, including any warranty of merchant ability or fitness for a particular purpose.

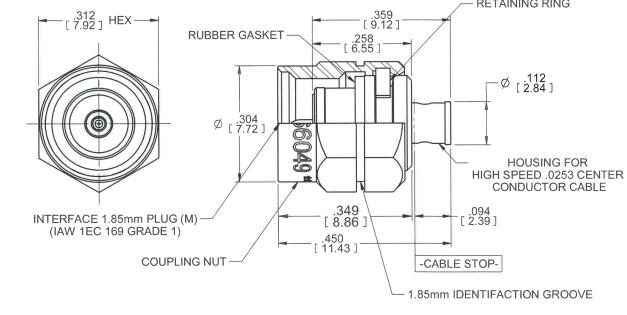

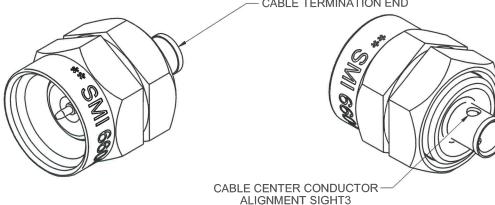

Southwest Microwave, Inc.

9055 South McKemy Street

Tempe, Arizona 85284-2946

Telephone (480) 783-0201

Fax (480) 783-0360

RELEASE

SOUTHWEST

MICROWAVE

X0

HOLE / SOLDER HOLE

TITLE 1.85mm PLUG DIRECT SOLDER HIGH SPEED .0253 CENTER **CONDUCTOR CABLE**

RN BY: DATE: T. CLARE 10/01/2015	MODEL NO.	18270-05G	REV.
SCALE 4:1		10210-030	Vn
SHEET: 1 OF 1	DWG. NO.	79RV62788	_

- 6. PERFORMANCE IS DEPENDENT UPON THE SPECIFIC CABLE SELECTED AND THIRD PARTY CABLE PREPARATION BEYOND THE CONTROL OF SOUTHWEST MICROWAVE.
- 5. SPECIFICATIONS PER SPECIFICATION SHEET 91RV61135.
- CABLE TERMINATION INSTRUCTION SPEC. 91S60879.
- 3. MATERIAL AND FINISH:
 - 3.1 MATERIALS
 - 3.1.1 CENTER CONTACT, RETAINING RING: BeCu ALLOY
 - 3.1.2 HOUSING, BUSHING: BeCu ALLOY OR BRASS ALLOY
 - 3.1.3 COUPLING NUT: STAINLESS STEEL
 - 3.1.4 BEAD RING: ULTEM
 - 3.1.5 GASKET: SILICONE RUBBER
 - 3.2 FINISHES
 - 3.2.1 CENTER CONTACT, HOUSING AND BUSHING: **GOLD PLATE PER MIL-DTL-45204**
 - 3.2.2 COUPLING NUT: PASSIVATE PER ASTM A967
- 2. CONNECTOR DESIGN IS COMPATIBLE WITH CURRENT MATERIAL AND PROCESS REQUIREMENTS FOR RoHS AND WEEE PER EUROPEAN COMMUNITY DIRECTIVE 2002/95/EC.
- 1. ALL DIMENSIONS ARE IN INCHES. ALL ANGLES ARE IN DEGREES. DIMENSIONS SHOWN IN BRACKETS [XXX] ARE IN MILLIMETERS.

NOTES: UNLESS OTHERWISE SPECIFIED.

