
MODEL No.:


2270-04G

NOTE: Information herein is believed by Southwest Microwave, Inc. to be accurate. However, Southwest Microwave assumes no responsibility for any omissions or errors or inaccuracies for its use or for any infringements of patents or other rights of third parties that may result from its use. Data is intended for informational purpose only and does not constitute a contract of sale or any express or implied warranty, including any warranty of merchant ability or fitness for a particular purpose.

- 6. PERFORMANCE IS DEPENDENT UPON THE SPECIFIC CABLE SELECTED AND THIRD-PARTY CABLE PREPARATION BEYOND THE CONTROL OF SOUTHWEST MICROWAVE.
- 5. FOR SPECIFICATIONS SEE SPECIFICAATION SHEET 91BV61132.
- CABLE TERMINATION INSTRUCTION SPEC. 91S61001.
- 3. MATERIAL AND FINISH:
 - 3.1 MATERIALS
 - 3.1.1 CENTER CONTACT: BeCu ALLOY - GOLD PLATTED
 - 3.1.2 RETAINING RING: BeCu ALLOY
 - 3.1.3 HOUSING AND BUSHING: BRASS ALLOY - GOLD PLATTED
 - 3.1.4 DIELECTRICS: HIGH TEMPERATURE POLYMER
 - 3.1.5 BEAD RING: ULTEM 1000 PER ASTM D5205
 - 3.1.6 COUPLING NUT: STAINLESS STEEL - PASSIVATED
 - 3.1.7 GASKET: SILICONE RUBBER
- 2. CONNECTOR DESIGN IS COMPATIBLE WITH CURRENT MATERIAL AND PROCESS REQUIREMENTS FOR RoHS AND WEEE PER EUROPEAN COMMUNITY DIRECTIVE 2002/95/EC.
- 1. ALL DIMENSIONS ARE IN INCHES. ALL ANGLES ARE IN DEGREES. DIMENAIONS SHOWN IN BRACKETS [XXX] ANE IN MILLIMETERS.

NOTES: UNLESS OTHERWISE SPECIFIED.

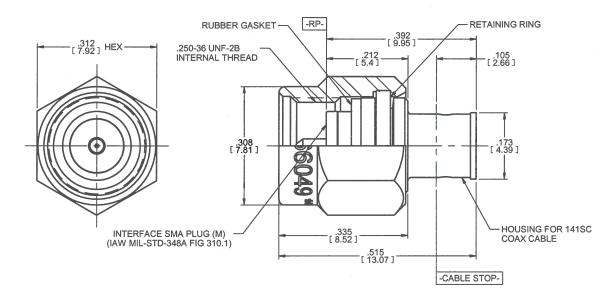

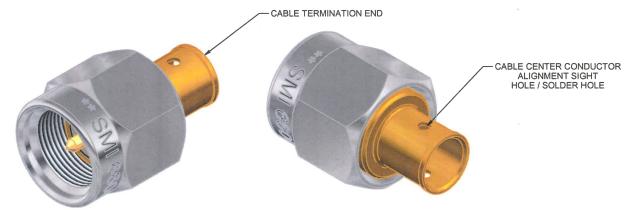

TITLE



Fax (480) 783-0360

SMA, P. DS, 141SC CBL

REV.

DRN BY: DATE: T. CLARE 11/07/12 MODEL NO. 2270-04G SCALE 4:1 DWG. NO. 79BV61560 SHEET: 1 OF 1