
NOTE: Information herein is believed by Southwest Microwave, Inc. to be accurate. However, Southwest Microwave assumes no responsibility for any omissions or errors or inaccuracies for its use or for any infringements of patents or other rights of third parties that may result from its use. Data is intended for informational purpose only and does not constitute a contract of sale or any express or implied warranty, including any warranty of merchant ability or fitness for a particular purpose.

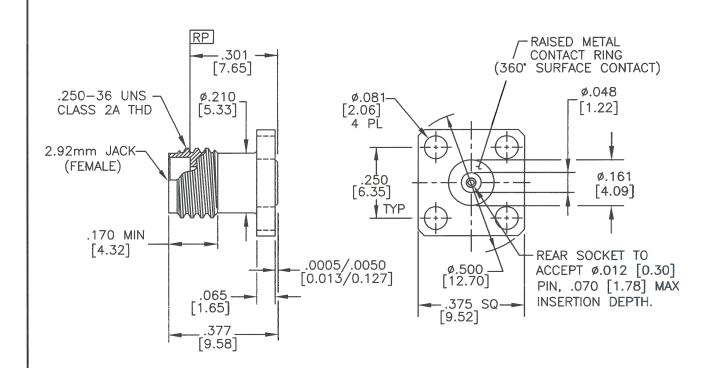

HOUSING:	STEEL CRES ALLOY UNS—S30300 PER ASTM A582 PASSIVATED PER ASTM A967—99; Para. 7.1.1.1; CITRIC 1 USING CITRIC ACID	
CONTACT:	BeCu ALLOY UNS-C17300 PER ASTM B196 GOLD PLATE PER ASTM B488	
DIELECTRIC:	KEL-F (PCTFE) PER ASTM D1430	
DIELECTRIC:	ULTEM 1000 PER ASTM D5205	
ITEM	MATERIAL & FINISH	

 ALL DIMENSIONS ARE IN INCHES, ALL ANGLES ARE IN DEGREES. DIMENSIONS SHOWN IN BRACKETS [XXX] ARE IN MILLIMETERS.

DATE:

NOTES: UNLESS OTHERWISE SPECIFIED

CONTACT GAGING SPEC.	91K52116	
SPECIFICATIONS	91K52077	
INTERFACE	91K52019	
SPECIFICATION GROUP	DRAWING NO.	

	SOUTHWEST

RELEASE

Southwest Microwave, Inc. 9055 South McKemy Street Tempe, Arizona 85284—2946 Telephone (480) 783—0201 Fax (480) 783—0360

PATE: TITLE

2.92mm JACK (F) 4 HOLE 3/8SQ FLANGE ACCEPTS Ø.012 PIN

DRN BY: DATE MGD 09/ SCALE: 3:1	1012-273	SF REV.
SHEET: 1 OF	DWG. NO. 79K5760	7 A