



NOTE: Information herein is believed by Southwest Microwave, Inc. to be accurate. However, Southwest Microwave assumes no responsibility for any omissions or errors or inaccuracies for its use or for any infringements of patents or other rights of third parties that may result from its use. Data is intended for informational purpose only and does not constitute a contract of sale or any express or implied warranty, including any warranty of merchant ability or fitness for a particular purpose.

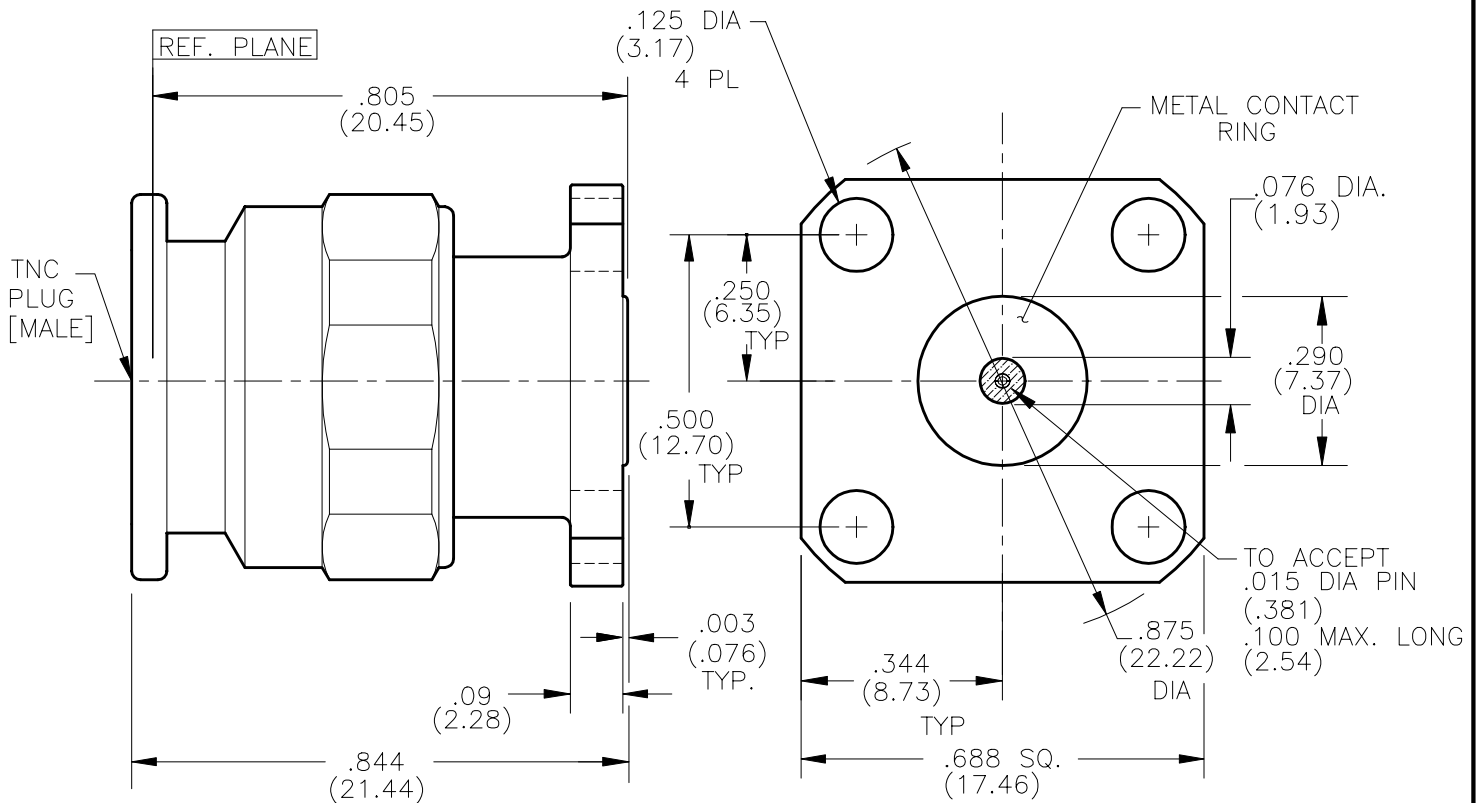

HOUSING: COUPLING NUT:	STEEL, CRES ALLOY UNS-S30300 PER ASTM-A582. PASSIVATE PER QQ-P-35.
CONTACT:	BeCu UNS-C17300 PER ASTM-B-196/197 GOLD PLATE PER MIL-G-45204
DIELECTRIC INSULATOR:	VIRGIN TFE FLUOROCARBON PER ASTM-D-1710 AND ASTM-D-1457
BEAD RING:	ULTEM 1000 PER ASTM-D-5205
RETAINING RING:	PHOSPHUR BRONZE PER QQ-B-746 COMP, A
GASKET:	SILICONE RUBBER PER ZZ-R-765
MATERIAL & FINISH	

2. INTERFACE IN ACCORDANCE WITH MIL-STD-348.
1. ALL DIMENSIONS ARE IN INCHES AND (METRIC). ALL ANGLES ARE IN DEGREES.
- NOTES: UNLESS OTHERWISE SPECIFIED

CONTACT GAGING SPEC. .015 REAR SOCKET	91D52103
SPECIFICATIONS	91D58705
INTERFACE	91D57680
SPECIFICATION GROUP	DRAWING NO.

REV A	RELEASE	DATE:	APRVD.	DATE:	TITLE	MODEL 411-04SF ULTEM CAPTURE TNC PLUG 11/16SQ FLANGE TO ACCEPT .015 DIA. PIN	
 Southwest Microwave, Inc. 9055 South McKemy Street Tempe, Arizona 85284-2946 Telephone (480) 783-0201 Fax (480) 783-0360					DRN BY: SS	DATE: 3/05	DWG. NO.
					SCALE: 3:1	79D58378	
					SHEET: 1 OF 1		