
MODEL No.:

50400-006P

NOTE: Information herein is believed by Southwest Microwave, Inc., to be accurate. However, Southwest Microwave assumes no responsibility for any omissions or errors or inaccuracies for its use or for any infringements of patents or other rights of third parties that may result from its use. Data is intended for informational purpose only and does not constitute a contract of sale or any express or implied warranty, including any warranty of merchantability or fitness for a particular purpose

TITLE

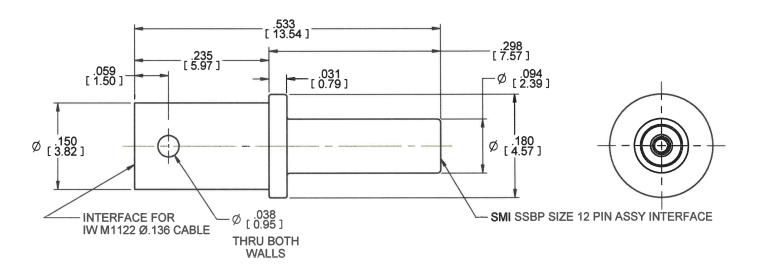

3. MATERIAL AND FINISH: 3.1 MATERIALS

OUTER AND CENTER CONTACTS, RETAINER BUSHING, AND CABLE BUSHING: BeCu ALLOY UNS-C17300 PER ASTM B196/197

FRONT BEAD RING:

VIRGIN PTFE FLUOROCARBON PER ASTM D1710,

TYPE 1, GRADE 1, CLASS B


REAR BEAD RING: ULTEM 1000 PER ASTM D5205


3.2 FINISHES

OUTER AND CENTER CONTACTS, RETAINER BUSHING, AND CABLE BUSHING: GOLD PLATE PER MIL-DTL-45204

- CONNECTOR DESIGN IS COMPATIBLE WITH CURRENT MATERIAL AND PROCESS REQUIREMENTS FOR ROHS AND WEEE PER EUROPEAN COMMUNITY DIRECTIVE 2002/95/EC.
- ALL DIMENSIONS ARE IN INCHES. ALL ANGLES ARE IN DEGREES. DIMENSIONS SHOWN IN BRACKETS [XXX] ARE IN MILLIMETERS.

NOTES: UNLESS OTHERWISE SPECIFIED.

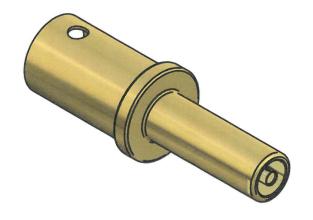

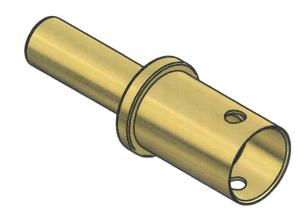

RELEASED	DATE:	APR.	Bilya	# 5/15/13
SOUTH		9055 Sou Tempe, A Telephon	vest Mico uth McKern Arizona 85 ne (480) 78) 783-0360	284-2946 33-0201

PIN ASSY SSBP SIZE 12, D38999, SER. I, III, & IV IW M1122 Ø.136 CABLE

DRN BY: D HAKE	DATE: 05/15/13	MODEL NO.	50400-006P	REV.
SHEET: 1 OF 1		DWG. NO.	79BP61125	A