


MODEL No.:

51000-002S

NOTE: Information herein is believed by Southwest Microwave, Inc. to be accurate. However, Southwest Microwave assumes no responsibility for any omissions or errors or inaccuracies for its use or for any infringements of patents or other rights of third parties that may result from its use. Data is intended for informational purpose only and does not constitute a contract of sale or any express or implied warranty, including any warranty of merchant ability or fitness for a particular purpose.

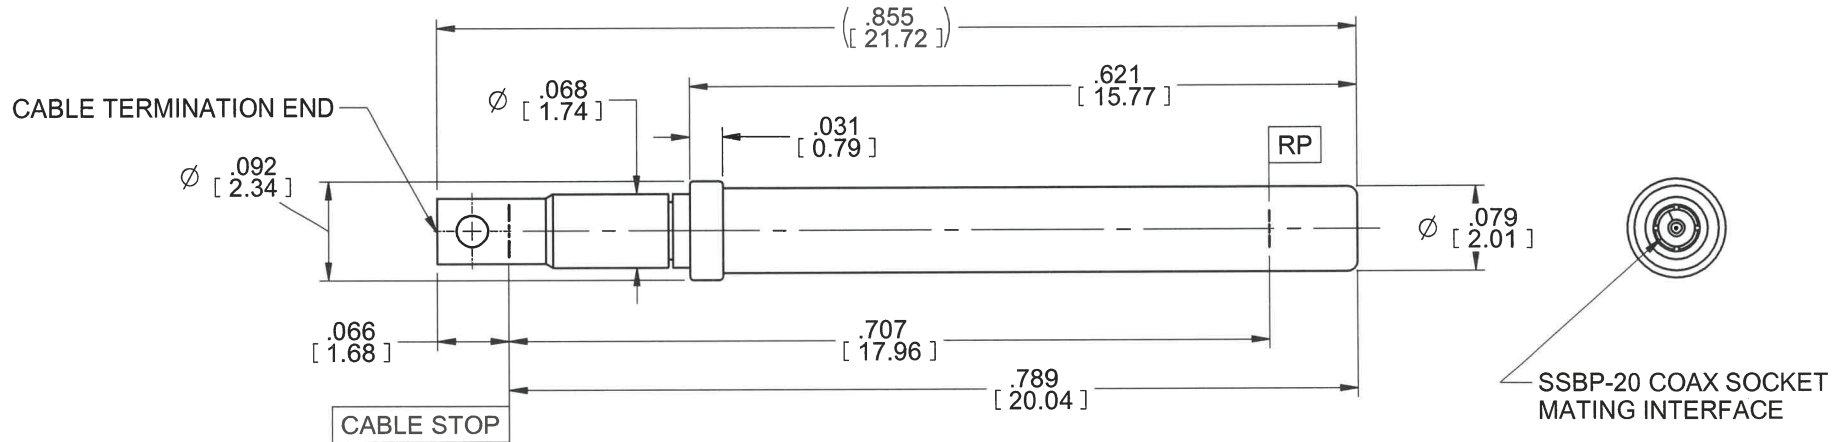

5. CABLE TERMINATION INSTRUCTION SPEC. 91BP61056

4. SPECIFICATION SHEET: 91BP61152

3. MATERIAL AND FINISH:

3.1 MATERIALS

3.1.1 CONTACTS AND BUSHINGS:
- BeCu ALLOY

3.1.2 DIELECTRICS:
- HIGH TEMPERATURE POLYMER

3.1.3 SPRING AND OUTER SLEEVE:
- STAINLESS STEEL

3.2 FINISHES

3.2.1 CONTACTS AND BUSHINGS:
- GOLD PLATE PER MIL-DTL-45204

3.2.2 SPRING AND OUTER SLEEVE:
- PASSIVATE

2. CONNECTOR DESIGN IS COMPATIBLE WITH CURRENT MATERIAL AND PROCESS REQUIREMENTS FOR RoHS AND WEEE PER EUROPEAN COMMUNITY DIRECTIVE 2002/95/EC.

1. ALL DIMENSIONS ARE IN INCHES. ALL ANGLES ARE IN DEGREES. DIMENSIONS SHOWN IN BRACKETS [XXX] ARE IN MILLIMETERS.


NOTES: UNLESS OTHERWISE SPECIFIED.

CABLE TERMINATION END
CABLE CENTER CONDUCTOR LOCATOR VIEWING AND SOLDER FEED HOLE.

SSBP-20 COAX SOCKET MATING INTERFACE

COAX SOCKET MATING INTERFACE

FSCM NO. 66049

REV. A	RELEASE (WAS SKDH4032)	BY: EJO	APRVD: B. Clout	DATE: 12/11/15	TITLE
 Southwest Microwave, Inc. 9055 South McKemy Street Tempe, Arizona 85284-2946 Telephone (480) 783-0201 Fax (480) 783-0360					SSBP-20 COAX SOCKET ASSEMBLY DIRECT SOLDER 047-2801 CABLE MIL-DTL-D38999 SERIES I,III & IV
					DRN BY: D.HAKE
SCALE 8:1			DWG. NO. 79BP61179		
SHEET: 1 OF 1					