





SSBP - 20HD

Test Data for 50102-001P & 51102-001S

Test Measurement Reference

All data was measured using an ANRITSU VNA 37297D with 1.85 mm test port connectors. Calibration was broadband SOLT (sliding load). Test frequency range was DC to 65 GHz. Cable assemblies were made using Temp-Flex® 047SC cable with two 1.85 mm plug/male connectors. The baseline cable assembly and the cable assembly with Size 20HD SSBP coaxes installed were both 6 inches between the reference planes of the 1.85 mm connectors. Both halves of the mated cable assembly pair were made phase equal (same electrical length). The SSBP cabled coaxes were installed in a mated pair of MIL-DTL-24308 connectors.

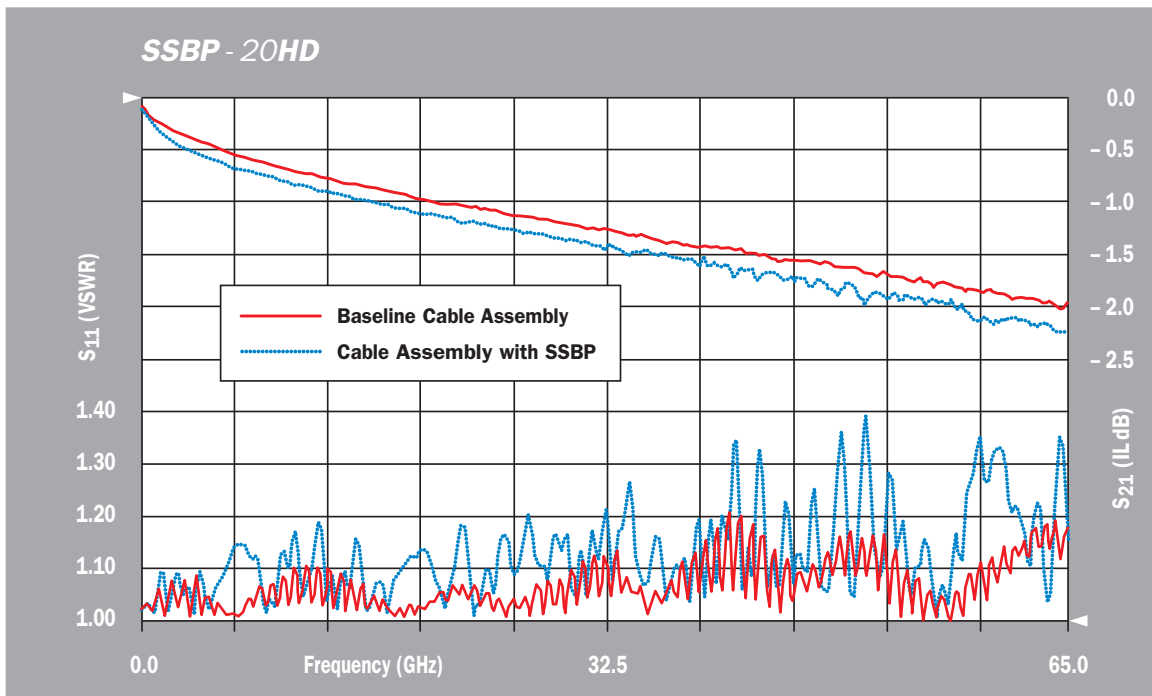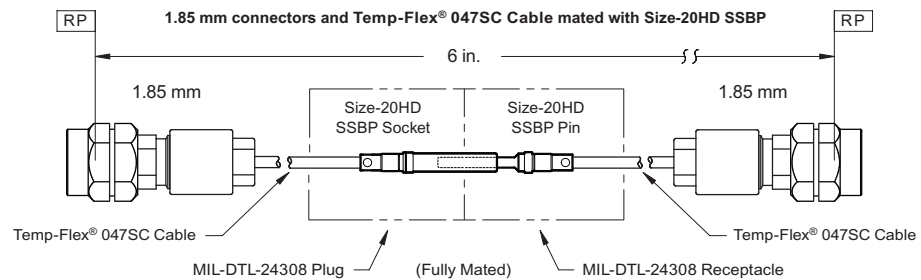

Comparison of base cable assembly to cable assembly with Size-20HD SSBP.