

Typical Microwave Performance



SSBP - 8


Test Data for 50600-003P & 51600-003S and Test Data for 50600-001P & 51600-001S

Test Measurement Reference

All data was measured using an HP VNA 8510C with 2.40 mm test port connectors. Calibration was broadband SOLT (sliding load). Two sets of cables were measured. **Configuration 1:** Cable assemblies were made using Insulated Wire IW 1251 cable with two field-replaceable 2.40 mm plug/male connectors produced by Southwest Microwave. Frequency range was DC to 40 GHz. **Configuration 2:** Cable assemblies were made using larger dia. Harbour LL-285 cable with SMA plug/male connectors. Frequency range was DC to 18 GHz. Adapters needed to interface with 2.40 mm VNA ports were de-embedded. The baseline cable assemblies and the cable assemblies with Size-8 SSBP coaxes installed all were 6 inches between the reference planes of the applicable plug/male connectors. Both halves of each mated cable assembly pair were made phase equal (same electrical length). The SSBP cabled coaxes were installed in mated pairs of MIL-DTL-38999 Series III connectors.



(Configuration 1)

Field-replaceable 2.40 mm plug connectors and Insulated Wire IW 1251 cable mated with Size-8 SSBP

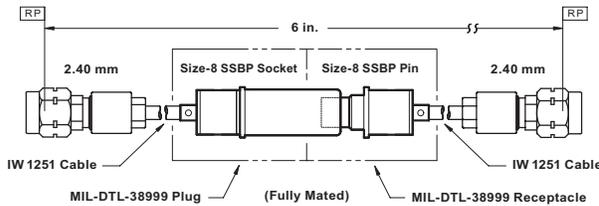

(Configuration 2)

SMA plug connectors and larger dia. Harbour LL-285 cable mated with Size-8 SSBP

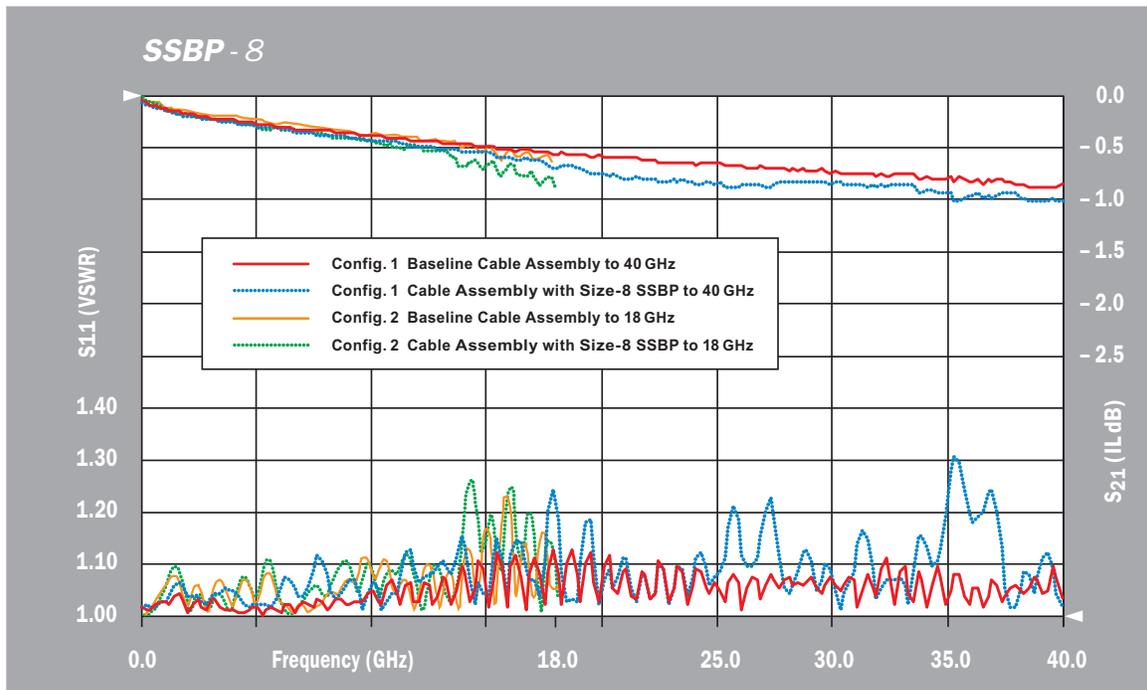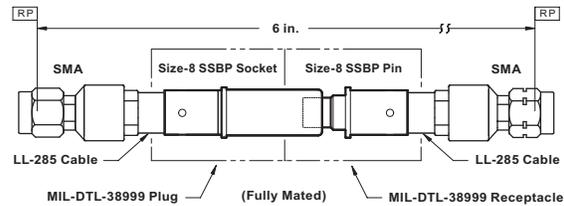

Comparison of Config. 1 & 2 baseline cable assemblies to cable assemblies with Size-8 SSBP connectors.