


NOTE: Information herein is believed by Southwest Microwave, Inc. to be accurate. However, Southwest Microwave assumes no responsibility for any omissions or errors or inaccuracies for its use or for any infringements of patents or other rights of third parties that may result from its use. Data is intended for informational purpose only and does not constitute a contract of sale or any express or implied warranty, including any warranty of merchant ability or fitness for a particular purpose.

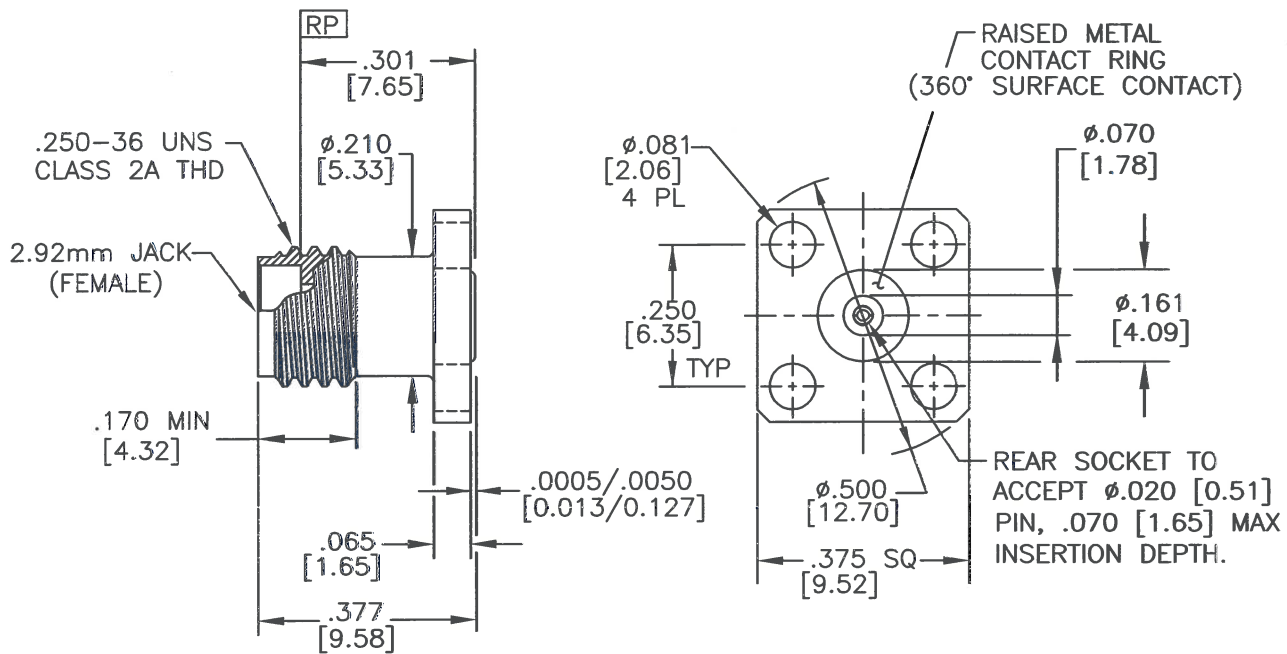

1. ALL DIMENSIONS ARE IN INCHES, ALL ANGLES ARE IN DEGREES. DIMENSIONS SHOWN IN BRACKETS [XXX] ARE IN MILLIMETERS.

NOTES: UNLESS OTHERWISE SPECIFIED

HOUSING:	STEEL CRES ALLOY UNS-S30300 PER ASTM A582 PASSIVATED PER ASTM A967-99; Para. 7.1.1.1; CITRIC 1 USING CITRIC ACID
CONTACT:	BeCu ALLOY UNS-C17300 PER ASTM B196 GOLD PLATE PER ASTM B488
DIELECTRIC:	KEL-F (PCTFE) PER ASTM D1430
DIELECTRIC:	ULTEM 1000 PER ASTM D5205
ITEM	MATERIAL & FINISH

APPLICATION SPEC	91K52174
CONTACT GAGING SPEC.	91K52119
SPECIFICATIONS	91K52084
INTERFACE	91K52019
SPECIFICATION GROUP	DRAWING NO.

REV B	REV BY MGD	ECN 9543	DATE: 09/19/16	APRVD: JW	DATE: 09/19/16
-------	------------	----------	----------------	-----------	----------------

TITLE		2.92mm JACK (F) 4 HOLE 3/8SQ FLANGE ACCEPTS 0.020 PIN	
DRN BY: DE	DATE: 12/13	MODEL NO.	1012-44SF
SCALE: 3:1		DWG. NO.	79K61216
SHEET: 1 OF 1			REV. B



Southwest Microwave, Inc.  
 9055 South McKemy Street  
 Tempe, Arizona 85284-2946  
 Telephone (480) 783-0201  
 Fax (480) 783-0360

MPD-A-O.L. 3x