

HOUSING AND COUPLING NUT: STEEL, CRES ALLOY UNS-S30300 PER ASTM-A582. PASSIVATE PER QQ-P-35.

CONTACT: BeCu UNS-C17300 PER ASTM-B-196/197. GOLD PLATE PER MIL-G-45204.

DIELECTRIC: ULTEM 1000 PER ASTM-D-5205. KEL-F PER MIL-P-46036.


RETAINING RING: BeCu UNS-C17300 PER ASTM-B-196/197.

GASKET: SILICONE RUBBER PER ZZ-R-765.

CONTACT SPECIFICATION	91K52111
SPECIFICATIONS	91Y54306
INTERFACE 2.40mm PLUG	91P53660
INTERFACE 2.92mm JACK	91K52019
SPECIFICATION GROUP	DRAWING NO.


MATERIAL & FINISH

REV: B3 ECN: 7258 DATE: 1/18/00 WDC
 REV: B2 ECN: 7253 DATE: 1-11-00 DWDC
 REV: B1 ECN: 7198 DATE: 12-10-99 EJO
 REV: B ECN: 7089 DATE: 8-9-99 DWDC

DRAWN DK	DATE 4/10/96	APPRD. <i>DWDC</i>	DATE 1/18/00	TITLE 101420-00SF 2.92mm JACK TO 2.40mm PLUG ADAPTER
 Southwest Microwave, Inc. 9055 South McKerny Street Tempe, Arizona 85284-2946 Telephone (480) 783-0201 Fax (480) 783-0360				SCALE 5:1 DWG. NO. 79Y54304 REV. B3
SHEET 1 OF 1				

DL-A-303

Southwest Microwave, Inc.

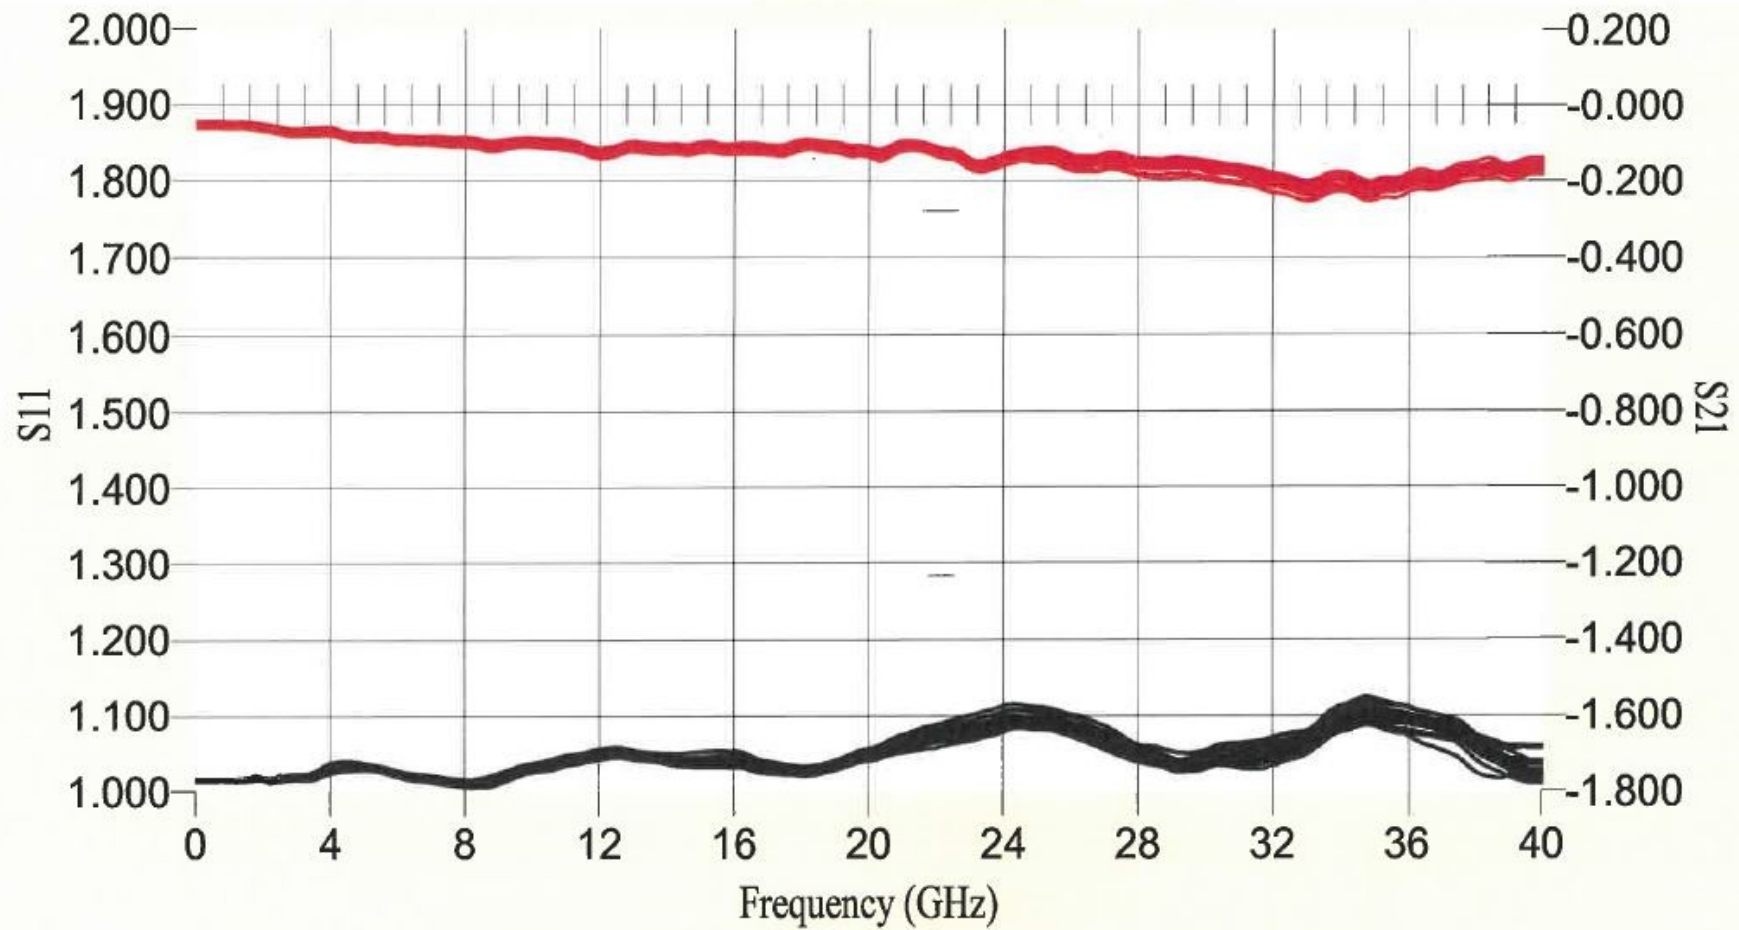

Operator Dillan Date 08-11-2020 @ 14:39:41 Model number: 101410-00SF QCIR:123413-000; Serial number 9
File name 9.dat Measurements,1,2,3,4,5,6,7,8,9,10,11,12,13,14,15,16,17,18,19,20,21,22,23,24
Notes 2.92 J TO 2.40 J ADP, SOLT, ADP REMOVAL

