

91P60872

NOTE: Information herein is believed by Southwest Microwave, Inc. to be accurate. However, Southwest Microwave assumes no responsibility for any omissions or errors or inaccuracies for its use or for any infringements of patents or other rights of third parties that may result from its use. Data is intended for informational purpose only and does not constitute a contract of sale or any express or implied warranty, including any warranty of merchant ability or fitness for a particular purpose.

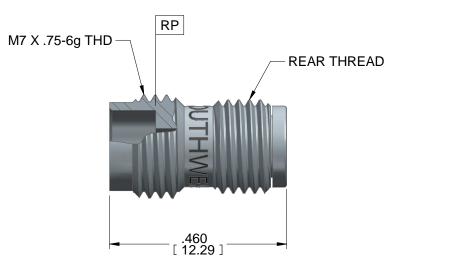



HOUSING:	STEEL, CRES ALLOY UNS-S30300 PER ASTM A582 PASSIVATED PER ASTM A967-99
CONTACT:	BeCu UNS-C17300 PER ASTM B196 GOLD PLATE PER MIL-DTL-45204
BEAD:	KEL-F (PCTFE) PER ASTM D1430
CAPTURE BEAD:	ULTEM 1000 PER ASTM D5205
ITEM	MATERIAL & FINISH

Model	Pin Size	Max. Pin Depth	ØΑ	ØВ	Rear Thread
1420-02SF	.020	.065	.0651	.210	.250-36 UNS-2A
1420-01SF	.012	.085	.0483	.210	.250-36 UNS-2A
1420-03SF	.009	.065	.0421	.210	.250-36 UNS-2A
1420-04SF	.009	.065	.0421	.200	M6 X .75-6g

TITLE

- 2. SEE DOCUMENT NO. 91P60874 FOR PRODUCT SPECIFICATIONS.
- 1. ALL DIMENSIONS ARE IN INCHES. ALL ANGLES ARE IN DEGREES. DIMENSIONS SHOWN IN BRACKETS [XXX] ARE IN MILLIMETERS.

NOTES: UNLESS OTHERWISE SPECIFIED.

REV A	RELEASED		APRVD. PLC	DATE: 7/25/12
	SOUTHWEST MICROWAVE	9055 Se Tempe, Telepho	west Microw buth McKemy St Arizona 85284- bne (480) 783-03 0) 783-0360	treet 2946

2.40 Jack (Female) Thread-in

	_	_		
DRN BY: EAG	DATE: 7/16/12	DWG. NO.		REV.
SHEET: 1 OF 1			91P60872	A