

HOUSING AND COUPLING NUT: STEEL, CRES ALLOY UNS-S30300 PER ASTM-A582. PASSIVATE PER QQ-P-35.

CONTACT: BeCu UNS-C17300 PER ASTM-B-196/197. GOLD PLATE PER MIL-G-45204.

DIELECTRIC: ULTEM 1000 PER ASTM-D-5205. KEL-F PER MIL-P-46036.

RETAINING RING: BeCu UNS-C17300 PER ASTM-B-196/197.

GASKET: SILICONE RUBBER PER ZZ-R-765.

CONTACT SPECIFICATION	91P52120
SPECIFICATIONS	91Y54305
INTERFACE 2.40mm JACK	91P53661
INTERFACE 2.92mm PLUG	91K52018
SPECIFICATION GROUP	DRAWING NO.

MATERIAL & FINISH

REV: A5 ECN: 7258 DATE: 1/18/00 DWDC  
 REV: A4 ECN: 7253 DATE: 1-11-00 EJO  
 REV: A3 ECN: 7198 DATE: 9-3-99 EJO

DRAWN DK	DATE 4/10/96	APRVD. DWDC	DATE 1/18/00
-------------	-----------------	----------------	-----------------


TITLE  
 101430-00SF  
 2.92mm PLUG TO 2.40mm JACK  
 ADAPTER



Southwest Microwave, Inc.  
 9055 South McKemy Street  
 Tempe, Arizona 85284-2946  
 Telephone (480) 783-0201  
 Fax (480) 783-0360

SCALE 5:1	DWG. NO. 79Y54303	REV. A5
SHEET 1 OF 1		

# Southwest Microwave, Inc.

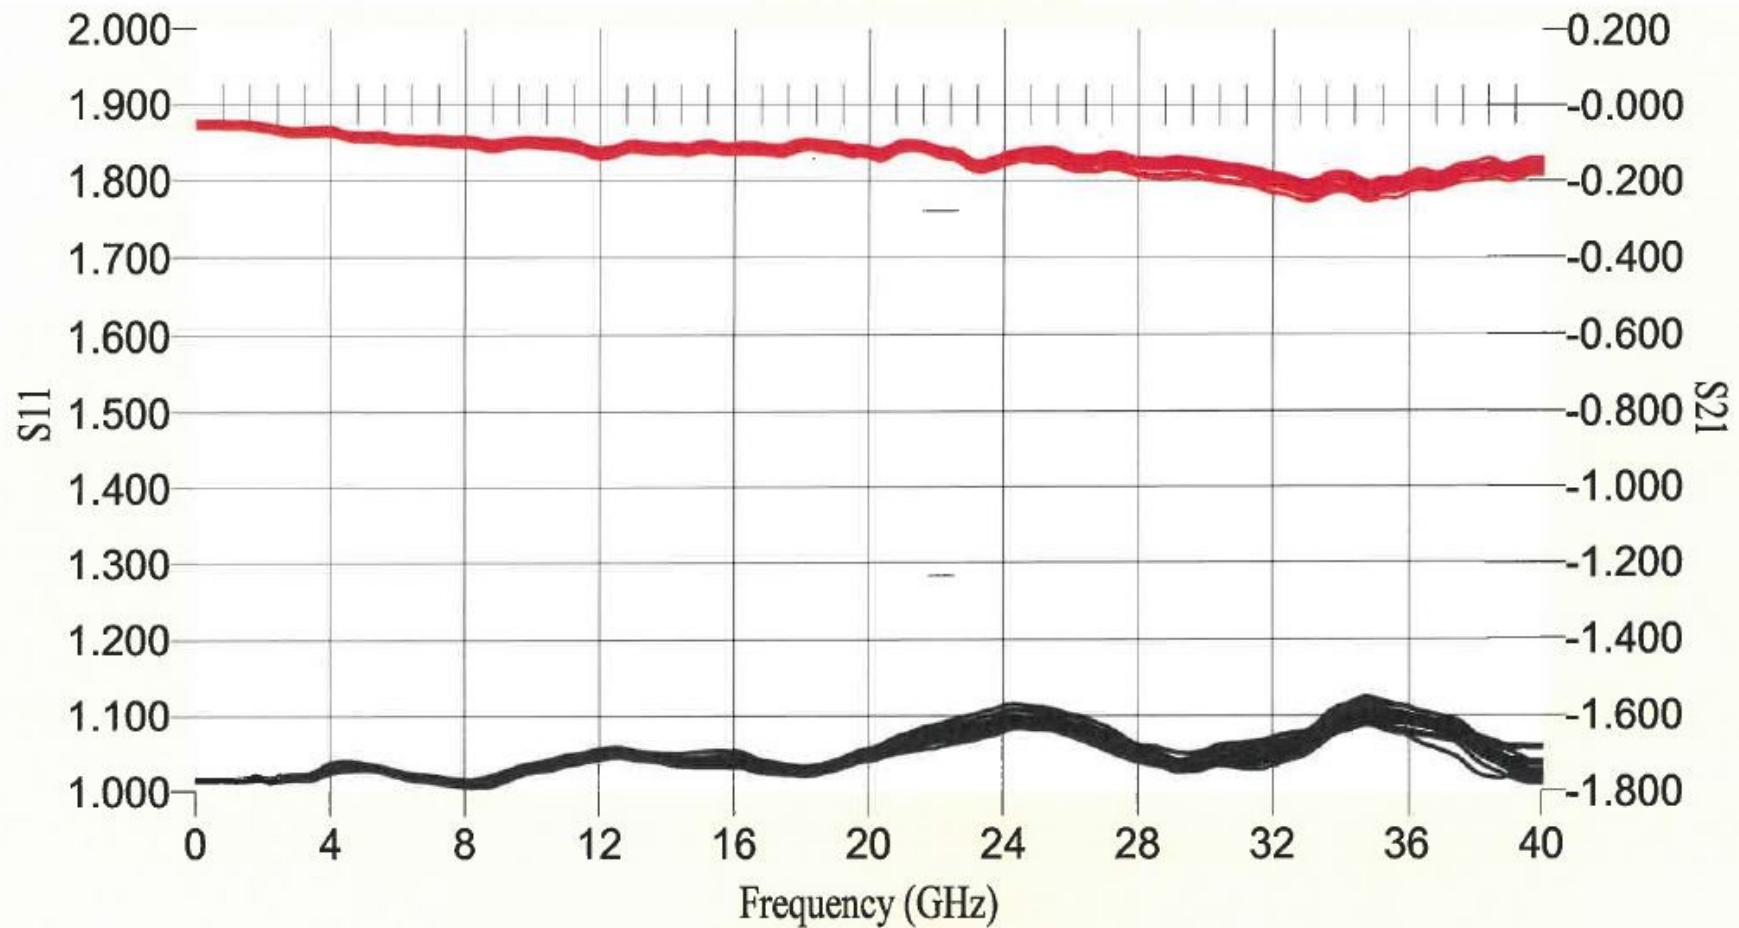

Operator Dillan Date 08-11-2020 @ 14:39:41 Model number: 101410-00SF QCIR:123413-000; Serial number 9  
File name 9.dat Measurements,1,2,3,4,5,6,7,8,9,10,11,12,13,14,15,16,17,18,19,20,21,22,23,24  
Notes 2.92 J TO 2.40 J ADP, SOLT, ADP REMOVAL

