


- HOUSING: STEEL, CRES ALLOY UNS-S30300  
PER ASTM-A582.  
PASSIVATE PER QQ-P-35.
- COUPLING NUT: STEEL, CRES ALLOY UNS-S30300  
PER ASTM-A582.  
PASSIVATE PER QQ-P-35.
- CONTACT: BeCu  
UNS-C17300 PER ASTM-B-196/197.  
GOLD PLATE PER MIL-G-45204.
- DIELECTRIC: ULTEM 1000 PER ASTM-D-5205.
- DIELECTRIC: KEL-F PER MIL-P-46036.
- RETAINING RING: BeCu  
UNS-C17300 PER ASTM-B-196/197.
- GASKET: SILICONE RUBBER PER ZZ-R-765.


MATERIAL & FINISH

CONTACT GAGING SPEC.	91P52120
SPECIFICATIONS	91P56682
INTERFACE-2.40 JACK	91P53661
INTERFACE-3.5 PLUG	91F56689
SPECIFICATION GROUP	DRAWING NO.

A		RELEASE	11/7/00	WMC
REV.	ECN	DESCRIPTION	DATE	APPVD
TITLE		61430-00SF 2.40mm JACK TO 3.5mm PLUG ADAPTER		
SCALE	3:1	DWG. NO.	79Y56420	
SHEET	1 OF 1	REV.	A	

DRAWN	EJO	DATE	6/20/00	APRVD.	WMC	DATE	11/14/00
 <p><b>Southwest Microwave, Inc.</b> 9055 South McKemy Street Tempe, Arizona 85284-2946 Telephone (480) 783-0201 Fax (480) 783-0360</p>							

# Southwest Microwave, Inc.

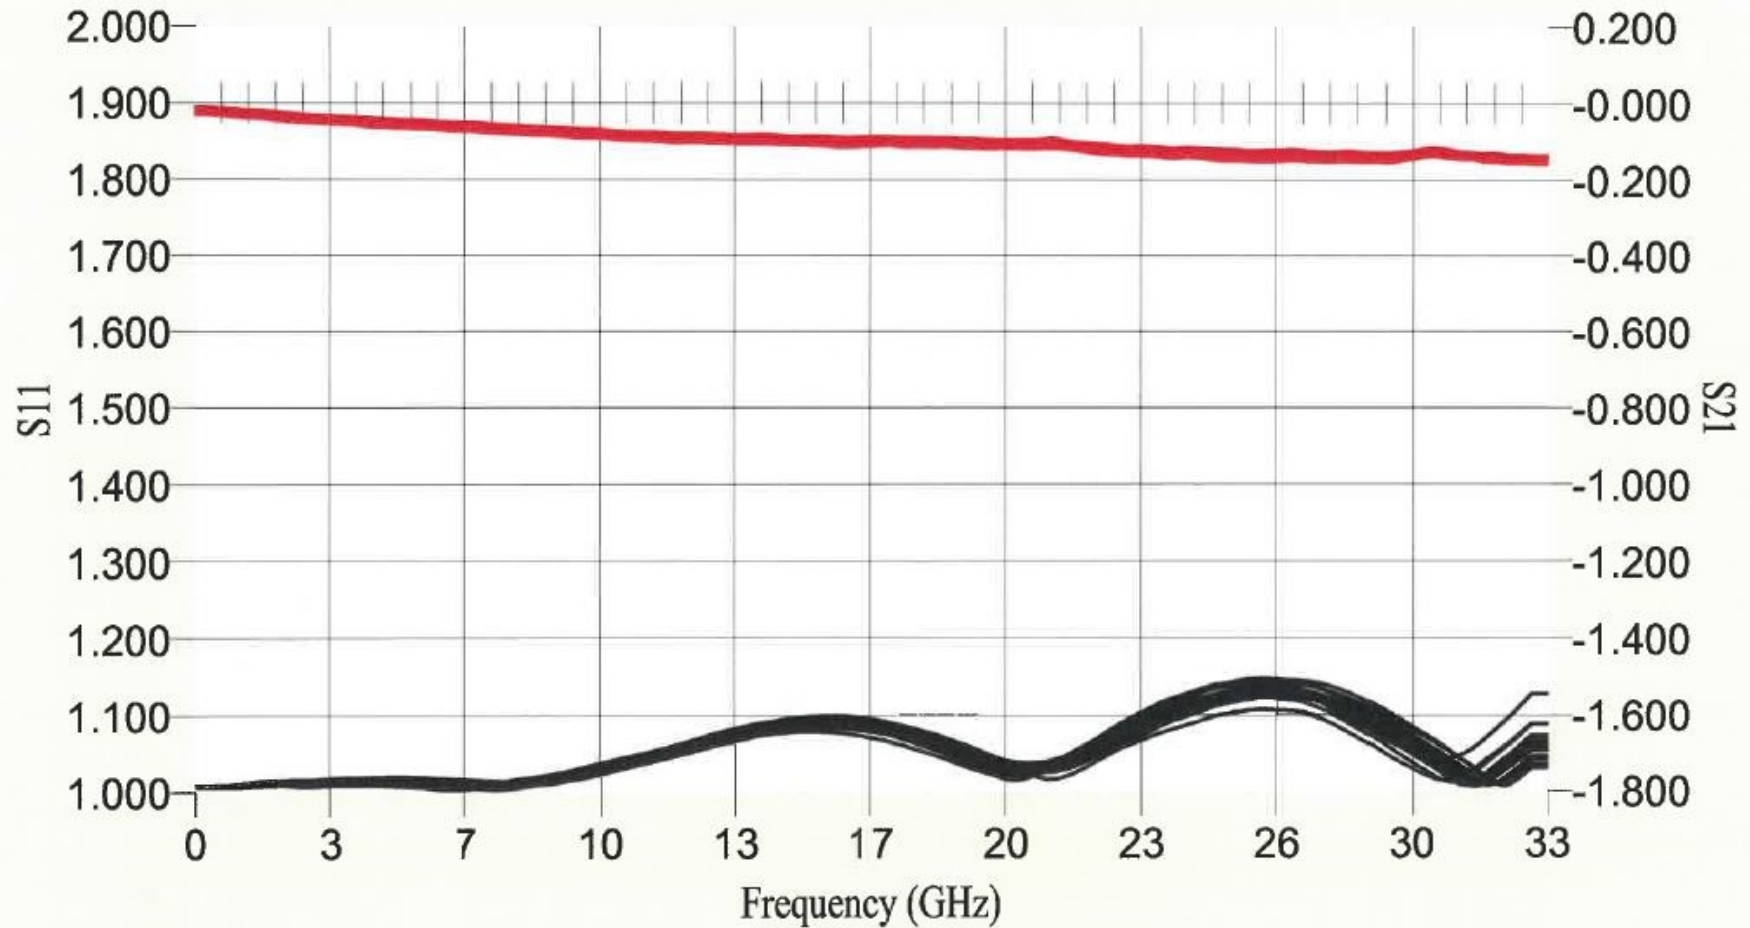

Operator Jeff Date 09-12-2019 @ 07:48:51 Model number: 61410-00SF QCIR:111464-000; Serial number 9

File name 9.dat Measurements,1,2,3,4,5,6,7,8,9,10,11,12,13,14,15,16,17,18,19,20,21,22,23

Notes 2.4 J to 3.5 J ADP SOLT S/N: 9



(480) 783-0201